

ESPECIFICACIONES Y OPCIONES

CUADRO	Orbea Avant carbon OMP disc, monocoque construction, tapered 1-1/8" - 1,5", BB 386mm, powermeter compatible, Thru Axle 12mm x 142mm rear, internal cable routing, EC/DC compatible, 27,2mm seat tube.
HORQUILLA	Avant OMP carbon disc fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts Thru axle 12mm x 100m
PLATO	Shimano Ultegra R8000 34x50t FSA Gossamer Pro 32x48t Shimano Ultegra R8000 39x53t Rotor Aldhu 36x52t Rotor 2INpower DM 34x50t Rotor 2INpower DM 36x52t
DIRECCION	FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings
MANILLAR	FSA Gossamer Compact FSA Energy Compact FSA K-Force Compact Vision Metron 4D Compact
POTENCIA	Orbea OC-III FSA Energy FSA OS-99 CSI
MANETAS	Shimano ST-8070
FRENO	Shimano R8070 Hydraulic Disc
PIÑON	Shimano Ultegra R8000 11-28t 11-Speed Shimano Ultegra R8000 11-25t 11-Speed Shimano Ultegra R8000 11-30t 11-Speed Shimano Ultegra R8000 11-32t 11-Speed (RD GS)
CAMBIO	Shimano Ultegra Di2 R8050 SS Shimano Ultegra RD-R8050 GS
DESVIADOR	Shimano Ultegra Di2 R8050
CADENA	KMC X11-EL
RUEDA	FULCRUM Racing 500 DB Mavic Ksyrium Elite Black UST Clincher + Tires Fulcrum Racing Quattro Carbon DB DT Swiss ERC1400 Spline 47
CUBIERTA	Vittoria Rubino Foldable 700x25 60TPI G+ Hutchinson Fusion 5 All Season TLR 700x25


GEOMETRÍA

TALLA	47	49	51	53	55	57	60
1 - SEAT_TUBE	410	440	470	490	510	530	560
2 - TOP_TUBE	508	520	533	547	559	578	592
3 - HEAD_TUBE	108	121	138	158	181	200	221
4 - CHAIN_STAY				415			
5 - BB_HEIGHT	270	270	270	272	272	272	272
6 - BB_DROP	75	75	75	73	73	73	73
7 - WHEELBASE	978	979	989	992	1002	1013	1025
8 - HEAD_ANGLE	71º	71.5º	71.9º	72.4º	72.6º	72.8º	73º
9 - SEAT_ANGLE	74.5º	74º	73.75º	73.5º	73.5º	73º	73º
10 - STANDOVER	727.5	750	771.6	793.3	814	832.4	857.3
11 - REACH	364	368	372	378	383	390	398
12 - STACK	520	535	553	572	595	614	635
13 - FORK_LENGTH				380			
14 - OFFSET	50	50	50	45	45	45	45

ERGONOMÍA

TALLA	BIELA	POTENCIA	MANILLAR
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

* La medida del manillar es centro-centro

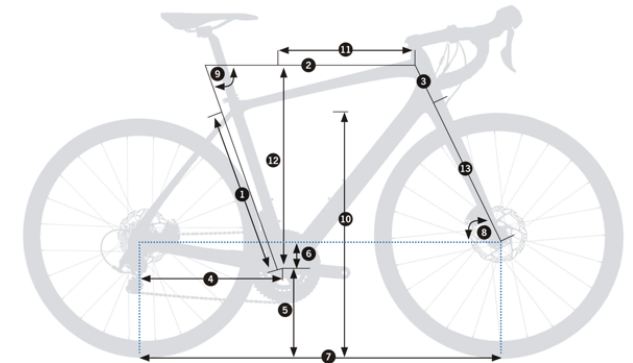

	Hutchinson Fusion 5 All Season TLR 700x28
	Hutchinson Sector 700x28 TLR
	Hutchinson Sector 700x32 TLR
PEDALES	N/A
TIJA SILLIN	FSA SL-K SB20 27.2x350mm Di2 compatible
	FSA S-LK Offset SB0 27,2x350/400mm
	FSA K-Force Offset SB0 27,2x350/400mm
	FSA K-Force Offset SB25 27,2x350/400mm
SILLIN	Prologo Kappa Space STN size 147mm
	Prologo Scratch-2 Tirox size 143 mm Black
	Prologo Nago Evo Space Tirox size 141mm
	Prologo Dimension T4,0 Black
	Selle Italia SLR Kit Carbonio Black
CINTA MANILLAR	Velo Anti-Slippery/Shock Proof
--	